

# SmartSolar Charge Controller MPPT 150/35




SmartSolar Charge Controller  
MPPT 150/35



Bluetooth sensing  
Smart Battery Sense



Bluetooth sensing  
BMV-712 Smart Battery Monitor

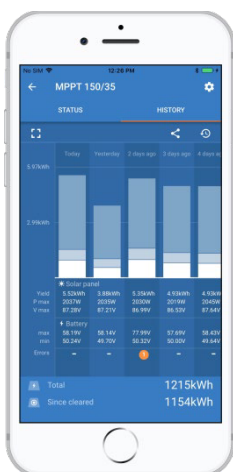

### Bluetooth Smart built-in

The wireless solution to set-up, monitor, update and synchronise SmartSolar Charge Controllers.

### VE.Direct

For a wired data connection to a Color Control GX, other GX products, PC or other devices

### Ultrafast Maximum Power Point Tracking (MPPT)

Especially in case of a clouded sky, when light intensity is changing continuously, an ultra-fast MPPT controller will improve energy harvest by up to 30% compared to PWM charge controllers and by up to 10% compared to slower MPPT controllers.

### Advanced Maximum Power Point Detection in case of partial shading conditions

If partial shading occurs, two or more maximum power points may be present on the power-voltage curve. Conventional MPPTs tend to lock to a local MPP, which may not be the optimum MPP. The innovative BlueSolar algorithm will always maximize energy harvest by locking to the optimum MPP.

### Outstanding conversion efficiency

No cooling fan. Maximum efficiency exceeds 98%. Full output current up to 40°C (104°F).

### Flexible charge algorithm

Fully programmable charge algorithm (see the software page on our website), and eight preprogrammed algorithms, selectable with a rotary switch (see manual for details).

### Extensive electronic protection

- Over-temperature protection and power derating when temperature is high.
- PV short circuit and PV reverse polarity protection.
- PV reverse current protection.

### Internal temperature sensor

Compensates absorption and float charge voltage for temperature.

### Optional external battery voltage and temperature sensing via Bluetooth

A Smart Battery Sense or a BMV-712 Smart Battery Monitor can be used to communicate battery voltage and temperature to one or more SmartSolar Charge Controllers.

### Fully discharged battery recovery function

Will initiate charging even if the battery has been discharged to zero volts. Will reconnect to a fully discharged Li-ion battery with integrated disconnect function.

| SmartSolar Charge Controller  | MPPT 150/35   |
|---|---|
| Battery voltage   | 12 / 24 / 48V Auto Select<br>(software tool needed to select 36V)               |
| Rated charge current  | 35A   |
| Nominal PV power 1a, b)   | 12V: 500W / 24V: 1000W / 36V: 1500W / 48V: 2000W                                |
| Max. PV short circuit current 2)  | 40A   |
| Maximum PV open circuit voltage   | 150V absolute maximum coldest conditions<br>145V start-up and operating maximum |
| Maximum efficiency  | 98%   |
| Self-consumption  | 12V: 20mA 24V: 15mA 48V: 10mA   |
| Charge voltage 'absorption'   | Default setting: 14,4 / 28,8 / 43,2 / 57,6V (adjustable)                        |
| Charge voltage 'float'  | Default setting: 13,8 / 27,6 / 41,4 / 55,2V (adjustable)                        |
| Charge algorithm  | multi-stage adaptive (eight pre-programmed algorithms)                          |
| Temperature compensation  | -16 mV / -32 mV / -64 mV / °C   |
| Protection  | PV reverse polarity<br>Output short circuit<br>Over-temperature                 |
| Operating temperature   | -30 to +60°C (full rated output up to 40°C)                                     |
| Humidity  | 95%, non-condensing   |
| Data communication port   | VE.Direct<br>See the data communication white paper on our website              |
| ENCLOSURE   |   |
| Colour  | Blue (RAL 5012)   |
| Power terminals   | 16 mm <sup>2</sup> / AWG6   |
| Protection category   | IP43 (electronic components), IP22 (connection area)                            |
| Weight  | 1,25 kg   |
| Dimensions (h x w x d)  | 130 x 186 x 70 mm   |
| STANDARDS   |   |
| Safety  | EN/IEC 62109-1, UL 1741, CSA C22.2  |
| 1a) If more PV power is connected, the controller will limit input power.<br>1b) The PV voltage must exceed Vbat + 5V for the controller to start.<br>Thereafter the minimum PV voltage is Vbat + 1V.<br>2) A PV array with a higher short circuit current may damage the controller. |   |